


NEW *Fast Trak* Trapeze suspension system


- Multi-tier services
- Stackable packaging
- Pre-cut for easy transport



HVAC

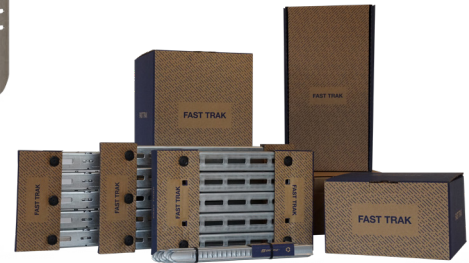

Pipework

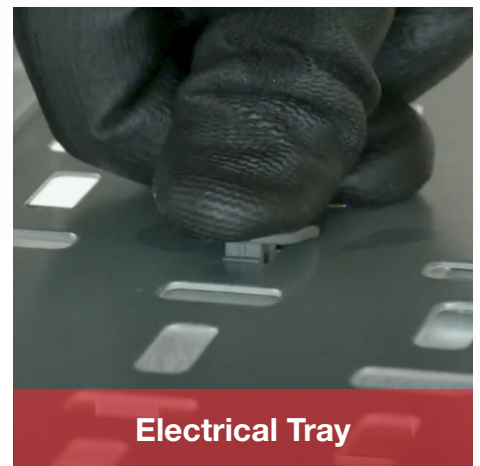

Electrical Tray

To discuss how Fast Trak could fit into your next install
☎ 905-669-7448 | ✉ sales@fasteninghouse.com


Pre-fabricated trapeze bracket solution offering speed, flexibility and efficient use of space, for the installation of electrical containment, pipework, ductwork and other mechanical services in restricted places.

FEATURES / BENEFITS

- **Quick** – up to six times faster to install than traditional suspension systems
- **Safe** – pre-fabricated system which removes the need to cut threaded rod or channel on-site
- **Tool free adjustment** – bracket can be moved up and down the tracks to accommodate changes in position during installation
- **Zero waste** – tracks bend neatly under bracket*
- **Versatile** – four-sided bracket provides suspension point on every face; 'ideal for pre-fab installations or multi-tiered configurations to accommodate additional services
- **Easy measurement** – indicators at each end of the bracket offer reference points when marking fixing points on the ceiling; level markers on tracks every 5 slots (2" / 50 mm increments) for easy leveling without tools
- **Neat & tidy** – system can be 'stacked' on-site to reduce storage requirements



INSTALLATION & ADJUSTMENT

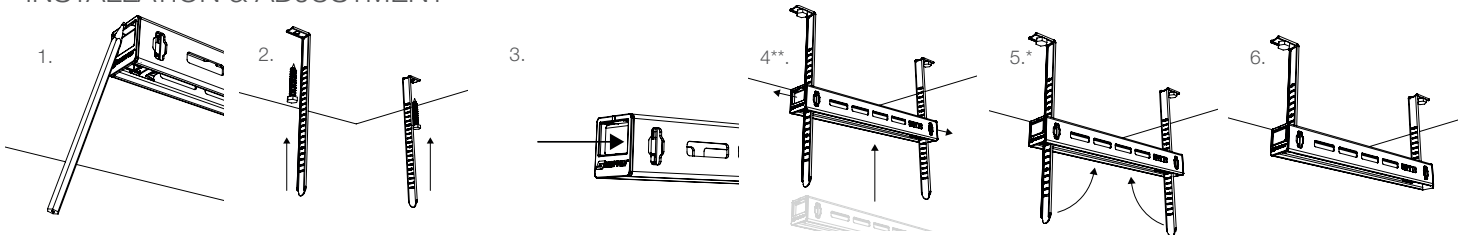


Internal applications only. Do not adjust under load. No dynamic loading. Single use only.

*Excess tracks can also be bent back and forth to snap off once bracket is levelled & secured for a neater finish. Bending tracks by hand is not recommended when excess is under 4" / 100 mm.


SPECIFICATION

Bracket

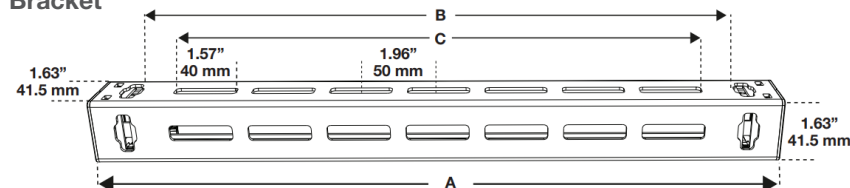

Bracket	FTB-9IN	FTB-13IN	FTB-17IN*	FTB-21IN	FTB-25IN*	FTB-29IN*	FTB-33IN*
A (in / mm) Length	9.4 / 239	13.3 / 339	17.3 / 439	21.2 / 539	25.2 / 639	29.1 / 739	33.0 / 839
B (in / mm) Suspension Space	6.9 / 176	10.9 / 276	14.8 / 376	18.7 / 476	22.7 / 576	26.6 / 676	30.6 / 776
C (in / mm) Working Space	5.5 / 140	9.4 / 240	13.4 / 340	17.3 / 440	21.3 / 540	25.2 / 640	29.1 / 740
No. of Slots	3	5	7	9	11	13	15
Bracket	FTB-37IN	FTB-41IN	FTB-45IN	FTB-49IN	FTB-53IN	FTB-58IN	FTB-61IN
A (in / mm) Length	37.0 / 939	40.9 / 1039	44.8 / 1139	48.8 / 1239	52.7 / 1339	56.7 / 1439	60.6 / 1539
B (in / mm) Suspension Space	34.5 / 876	38.4 / 976	42.4 / 1076	46.3 / 1176	50.2 / 1276	54.2 / 1376	58.1 / 1476
C (in / mm) Working Space	33.1 / 840	37.0 / 940	40.9 / 1040	44.9 / 1140	48.8 / 1240	52.8 / 1340	56.7 / 1440
No. of Slots	17	19	21	23	25	27	29

Track



Track	A in (mm)	B in (mm)
FTT-8IN	7.9 (200)	3.5 (90)
FTT-12IN*	11.8 (300)	7.5 (190)
FTT-16IN	15.7 (400)	11.4 (290)
FTT-20IN	19.7 (500)	15.4 (390)
FTT-24IN*	23.6 (600)	19.3 (490)
FTT-28IN	27.6 (700)	23.2 (590)
FTT-31IN	31.5 (800)	27.2 (690)
FTT-35IN*	35.4 (900)	31.1 (790)
FTT-39IN	39.4 (1000)	35.0 (890)
FTT-43IN	43.3 (1100)	39.0 (990)
FTT-47IN*	47.2 (1200)	42.9 (1090)
FTT-51IN	51.2 (1300)	46.9 (1190)
FTT-55IN	55.1 (1400)	50.8 (1290)
FTT-59IN*	59.1 (1500)	54.7 (1390)

SUBMITTAL INFORMATION

Safe Working Load:

Up to 440 lbs / 200 kg at 3:1 Safety Factor
See table on reverse page for maximum working loads.

Material:

Track & Bracket Material – BS EN 10346:2009
DX51D (Mild Steel) (Mild Steel, Pre-Galv Z275)
Cartridge Housing – ABS Plastic
Spring – BS 2056 Austenitic 302S26 G2
Latch – EN 10346

Approvals:

Lloyds certified
UL tested
TUV tested
APAVE tested